



LED DIGITAL DISPLAY LIGHTS

USER MANUAL

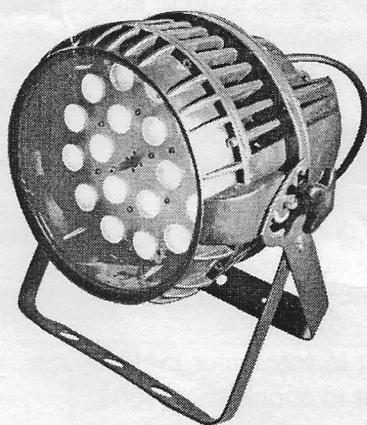

Attention

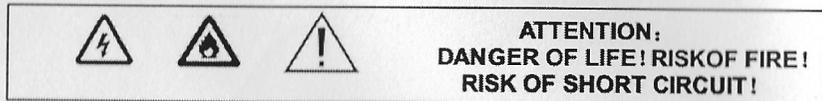


1. Please do not open the bottom cover yourself without permission.
Operate it accord the user manual. Call the technician when the machine breaks down.
2. Please do not see the led beam directly to avoid any damage.
3. This unit is for outdoor use.
4. Set the light immobility and try to avoid strong shake or hit.
5. Prevent dust into the equipment to avoid problems.
6. Please keep that there's no other equipment or decorating materials obstructed the exhaust fan and the vent-pipe when the equipment was working.
7. Before connect power, check the plug is immobility or not, power line should be connect well.
8. Please do not open or close the equipment frequently that's to avoid any affect to the life span of the led, and try the best to avoid the long time working.
9. Don't touch the light or draw the power line when your hand was wet.
And do not pull the electronic power line.
10. Maintain the distance at least 3M above from the equipment to the object.
11. This equipment does not have any parts can repair for the users, please do not open the equipment.
12. When the led became dim or damaged please contact the dealer timely.
13. When you want to retransfer the products, you'd better use the original package to shockproof.

Checking Parts

Please check if the following parts are included:

1 x LED Light

- 1 x Power cable
1 x User manual
1. AS PICTURE:

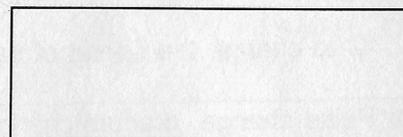

A B C D

- A. Function key
B. Add key
C. Subtract Key
D. Affirm key

Operating instructions:

- Press Key A to get 8 of different function effects.
- The first 2 number of the digital pipe stand for the present function (see the function table).
- The last 2 number stand for the parameter of swift code or address code of the Present function.
- Press B or C to change its parameter
- Press D to Affirm.

2. LED Displayer Function Table

(Choose the function then press Key "D" to Affirm is ok)

No	Display	Function
1	A001	11CH address code , (001—512) Key B or C to add or reduce the number of address code

2	D001	7CH address code , (001—512) Key B or C to add or reduce the number of address code
3	cc00	7 Color saltus step , (01—99) Key B、C to change the speed of saltus step
4	CP00	7 Color Pulse change, gradual change , (01—99) Key B、C to change the speed of gradual change
5	DE00	7 Color compisition change , (01—99) Key B、C to change the speed of compisition change
6	BEB1	7color change by sound control
7	R220	Red color choose , (000—255) Key B、C to change color
8	G220	Green color choose , (000—255) Key B、C to change color
9	B220	Blue color choose , (000—255) Key B、C to change color
10	W220	White color choose , (000—255) Key B、C to change color
11	Y220	Amber color choose , (000—255) Key B、C to change color

12	P220	Purple color choose , (000—255) Key B、C to change color
13	t000	Motor place , (000—255) Key B、C to change motor place

3. DMX512 Channel Instruction Manual

No	Function	Instruction Manual
CH1	Master dimming	R, G,B,W ,Y,P Master dimming, Linear light, From dark to bright
CH2	Master Strobe	R,G,B,W,Y ,P Master Strobe, from slow to fast
CH3	Function choose	0—50: DMX 9 channel control; 51—100: Saltus step; 101—150: Gradual change; 151—200: Gradual change; 201—255: Sound control
CH4	Function speed	Function speed, from slow to fast
CH5	R dimming	R dimming, Linear light, From dark to bright
CH6	G dimming	G dimming, Linear light, From dark to bright
CH7	B dimming	B dimming, Linear light, From dark to bright
CH8	W dimming	W dimming, Linear light, From dark to bright

CH9	Y dimming	Y dimming, Linear light, From dark to bright
CH10	P dimming	P dimming, Linear light, From dark to bright
CH11	Focus	From small to big

7CH

No	Function	Instruction Manual
CH1	R dimming	R dimming, Linear light, From dark to bright
CH2	G dimming	G dimming, Linear light, From dark to bright
CH3	B dimming	B dimming, Linear light, From dark to bright
CH4	W dimming	W dimming, Linear light, From dark to bright
CH5	Y dimming	Y dimming, Linear light, From dark to bright
CH6	P dimming	P dimming, Linear light, From dark to bright
CH7	Focus	From small to big

5. Function Feature:

Easy Operation ,Humanity Design, Dimming without strobe or shake.

Can use for record Video, photograph or television (broadcast) station etc. occasion.